

Provisional Specifications - Europe

GENERAL SPECIFICATIONS **

 L.O.A*: Hull length: Overall width: Beam: Light displacement: Air draft (max): Draught (including propeller): Fuel tank: Water tank: Sewage tank: Grey water tank (Option): Engine power: 	13,43m 12,52m 4,25m 4,20m 11 040kg 5,81m 1,15m 1 170L 400L 120L 320L 2 x 270 HP 2 x 300 HP	44'1" 41'1" 13'11" 13'9" 24 332 lbs 19'1" 3'9" 309 US Gal 106 US Gal 32 US Gal 66 US Gal 2 x 270 HP - 2 x 201 KW 2 x 300 HP - 2 x 223 KW

* with aft swimming platform + Anchor in position

ARCHITECTS / DESIGNERS _


- Naval Architect: BENETEAU POWER
- · Exterior and interior design: Andreani Design

EC CERTIFICATION **


- Category B 8 people
- Category C 10 people
 Category D 10 people









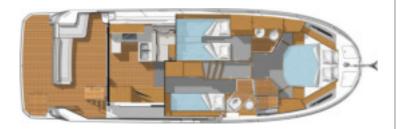



Provisional Specifications - Europe

STANDARD EQUIPMENT

CONSTRUCTION .

HULL

Composition:

- Sandwich (Polyester resin contact Glass fiber Balsa core)
- White gel coat (RAL 9010)
- · Structural hull counter moulding in monolithic laminate (Polyester resin contact Glass fiber)
- Profile:
- · Semi-floating hull

DECK

Composition:

- Sandwich (Polyester resin contact Glass fiber / Balsa core)
- · Structural counter moulding in monolithic laminate (Polyester resin Glass fiber)
- White gel coat (RAL 9010)
- · Diamond tip type non-slip covering

DECK EQUIPMENT

· Gangway door to starboard

MOORING LINES - MOORING

- 1 000 W Vertical electrical windlass, up / down and remote control from the windlass, wheelhouse and flybridge
- 10 Mooring cleats (L 300mm / 12")
- Stainless steel gunwale guards
- · 1 Compartment fitted with self-bailers and polyester covers

SAFETY ON DECK

- · Stainless steel pulpit, open and surrounding cockpit up to steps
- · Leather covered stainless steel handrails in the cockpit

COCKPIT

- · Self-bailing cockpit
- · 1 Locker in cockpit bottom gas piston assisted and lockable
- Gas cylinder locker integrated into the cockpit aft bench
- Hot/cold water cockpit shower
- Double starboard access door to the cockpit
- Swimming platform with rubbing strake (3,80 x 1,15mm / 12'6" x 3'9")
- 1 Sliding bench seat on the platform
- 1 Ergonomic bathing ladder with hand holds in the bathing platform
- 1 Emergency ladder
- 1 PMMA access door at the starboard side deck from the cockpit

FLYBRIDGE

- · Flybridge self-bailing
- · Retractable stainless steel staircase with double flybridge access ramp with teak steps
- Grey tinted windscreen in PMMA
- Access by polyester hatch
- Stainless steel pulpit surrounding aft of flybridge
- · Polyester mast for mounting navigation lights, radar and aerials
- · Central steering console
- · Control panel including: Electric engine controls, Electric windlass control, Thruster and Flaps
- Rev counter
- Tiller angle indicator
- Space for navigation electronics
- Steering wheel stainless steel
- Steering compass
- Hydraulic steering
- Fog horn
- Double USB socket
- 1 Adjustable pilot seat and 2 places for co-pilot with convertible backrest
- Flybridge saloon with face-to-face arrangement, consisting of an L-shaped bench with integrated stowage and a teak table
- GRP unit with sink, handrail and stowage
- Loud speakers



INTERIOR

- Choice of woodwork: Alpi teak (standard) or Alpi oak strip (optional)
- Beige teak deck joint
- · Marlin Brilliant white PVC internal upholstery
- PVC pilot bench Marlin white & Polaris
- Exterior upholstery Marlin Brilliant white PVC

INTERIOR STEERING STATION

- Clear glass windscreen with aluminium frames, black lacquered
- Anti-reflective coating
- · 3 Electric windscreen wipers with synchronizing system
- · Windscreen washer
- Demister
- · Side windows with black lacquered aluminium frames
- Dashboard with place for navigation electronics
- Engine dials: Revolution counter, Fuel gauge, Warnings, Tiller angle indicator, Flap indicators
- Controls: Electric windlass, Bow thruster, Navigation lights, Electric windscreen wipers, Fog horn & Electric dual engine controls
- Steering wheel
- Steering compass
- Double USB socket
- Dual pilot bench seat with hand rails
- Removable floor step
- Sliding side door with direct access to catwalk
- Cup holder

SALOON

Headroom: 1,90m / 6'33"

- · U-shaped saloon convertible to double berth
- · Dividing rail and curtains for berth
- Roman blinds
- · Varnished wood saloon table
- Storage cupboards
- 1 Large stowage drawer
- Sliding aft 2 single disappearing door aft bay with black lacquered aluminium frame
- · Leather sheathed stainless steel handrail in cockpit deckhead
- MP3, USB, IPOD[®] player with 2 speakers in the wheelhouse and 2 speakers in the cockpit

GALLEY

Headroom: 1,95m / 6'5"

U-shaped galley, facing the cockpit and the saloon - Includes:

- Work top made from laminated material with Nimbus Prima Corian edging
- 2 Stainless steel sinks with cold/hot water mixer taps under pressure
- Gas oven
- · 3-burner hob and oven with protective glass cover
- 215 L upright fridge with freezer function
- Storage & Drawers
- Bin with access from cockpit and galley
- Handrails

Provisional Specifications - Europe

OWNER'S CABIN (FORWARD)

- Headroom: 1,95m / 6'5"
- Double berth (1,95 x 1,60m / 6'5" x 5'3")
- Storage under berth
- Stowage on both sides of berth
- Mirror
- 1 Hanging locker with lighting
- 1 Cupboard with shelves
- 1 Opening deck hatch with fitted mosquito screen/blind
- 2 Hull windows with opening portholes and blackout blind
- Venetian blinds
- Padded headboard

HEAD (OWNER'S CABIN)

Headroom: 1,95m / 6'5"

Separate shower compartment with seat and porthole and teak lining • Mirror

- Top and bottom cupboard
- · Electric toilet flushing with fresh water and salt water
- Oval washbasin
- 1 Opening deck hatch with integrated blind
- 1 Hull porthole
- Venetian blinds

VIP CABIN (PORT)

Headroom: 1,96m / 6'6"

- 2 Single beds convertible into double beds (1,96 x 1,52m / 6'5" x 5'8")
- Cupboards
- · Storage under berth
- Cubby hole locker
- · Hull window with opening porthole and blackout blind
- 1 220V socket
- 2 USB sockets
- Padded headboard

LAZARETTE / THIRD CABIN (STARBOARD)

- Headroom: 2,10m / 6'11"
- Modular stowage
- Storage under berth
- Space for washer dryer
- 1 220V socket
- 2 USB sockets

STARBOARD HEADROOM (DAY TOILET)

Headroom: 1,92m / 6'4"

Mirror

- · Top and bottom cupboard
- 1 Opening porthole
- · Electric toilet flushing with fresh water and salt water
- Oval washbasin
- Mixer tap
- Shower
- Towel rail



Provisional Specifications - Europe

ENGINE

- · Choice of engines:
- Volvo D4 270 HP Diesel
- Volvo D4 300 HP Diesel
- Shaft line propulsion
- · Four-blade propellers
- Fuel filters
- Sea water filters
- Engine room soundproofed with high density foam (40 mm / 1-1/2" thick)
- Air intake for cooling the engine compartment on the port hull plating
- 1 Extinguisher
- · Dual deck filler for fuel tank with interconnection
- 2 Aluminium fuel tanks (capacity = 2 x 585 L/2 x 155 US Gal) with interconnection and provision for attachment of FPS (Fuel Polishing System) system
- Steering system:
- 2 Underhung rudders stainless steel
- Hydraulic steering
- Electric trim tabs

ELECTRICITY

- Electrical panel (12V / 220V)
- Shore power socket (220V)
- 10 220V Sockets:
- 2 in the saloon
- 2 in galley
- 2 in master cabin
- 1 in the VIP cabin
- 1 in the 3rd cabin
- 1 in the owner head
- 1 in the 2nd head
- 14 USB sockets:
- 2 in the saloon
- 2 at the pilot station
- 4 in master cabin
- 2 in the VIP cabin
- 2 in the 3rd cabin
- 2 on flying bridge
- 4 Engine batteries (12V 50 Ah)
 2 Service battery (12V 140 Ah)
- 2 Service battery (12V 140 A
- 2 Battery chargers (25 Ah)
- Outside and inside lighting (Overhead lights, Reading lights)
- · LED indirect lighting
- · Outside lighting (Navigation lights, Mooring light with stainless steel mountings)

PLUMBING _

- 1 Manual bilge pump (Cockpit)
- 2 Automatic electric bilge pumps
- · Water unit for pressurizing the hot / cold water circuit with accumulator tank
- 40 L / 11 US Gal water heater working off engine exchanger and 220 V
- · Water tank filler
- 2 Roto moulded water tanks (2 x 200L / 2 x 53 US Gal)
- · Drainage outlet for black water holding tank
- 1 Sewage tank (120L / 32 US Gal)
- 1 Waste water tank (45L / 12 US Gal)



Provisional Specifications - Europe

TRIM LEVEL & PACKS

TRIM LEVEL

	ESSENTIAL	COMFORT
Pump for deck washing		
12V Cockpit socket		
Pre-wiring for heating	•	
 Air conditioning pre-arrangement 	•	
 1 9" Raymarine internal screen 	•	
 1 9" Raymarine exterior display 		-
Raymarine dual station VHF		•
Cup holders		
Shore fresh water supply		
Double station deck searchlight		
 40 L refrigerator, in flying bridge 		
Inverter (2 KVA)		
Yacht Case - Tableware		
	Υ	•

PACKS_

ELECTRONIC PACK

- Ship control
- 1 9" Raymarine exterior display
- Windvane anemometer
- Autopilot (2 Posts)

AIR CONDITIONING PACK

- Generator (7,5 KVA 220V / 50Hz) + COCON
- Air conditioning (16 kBTU)

OPTIONS

AMBIANCE _

- · Oak strip version & Brown oak laminated floors
- Louvre doors, oak strip or teak
- · Ivory varnished, oak strip or teak louvre doors
- African Spirit Grey carpet (Wheelhouse + Saloon)
- Dune Berber carpet (Cabins + Passageway)
- Soft Natural carpet (Cockpit)
- · Greige fabric internal upholstery
- Gargoyle fabric internal upholstery
- FOGLIZZO leather internal upholstery
- · FOGLIZZO nubuck internal upholstery
- · Confort Dolce 51 external upholstery, with bolster seat on flybridge
- Marlin Brilliant white PVC fore sun deck
- Confort Dolce 51 forward sun deck
- Grey "Perle" hull
- Steel blue hull
- Ruby red hull



Provisional Specifications - Europe

OTHER OPTIONS

INTERIOR ACCOMMODATION

- Rotating pilot chair with handrails + Saloon table extension
- 40 L combined microwave over (as replacement for gas oven)
- · Grill oven microwave
- Washer dryer
- Dishwasher
- 3 burner induction hob (replacing gas stove)
- Ice maker
- Forced air heating
- Stowage In the aft cabin
- Single mattress in the 3rd cabin
- · Mosquito screens on side door, aft bay and portholes
- TV + DVD pre-wiring in the saloon
- TV + DVD pre-wiring in the forward cabin
- · Bose 2.1 Loudspeakers in the saloon (in place of the Fusion)

EXTERIOR OPTIONS

- · Mooring kit:
 - Delta achor 20 kg/35 lbs
 - Chain (10mm diameter length 32 m)
- Line (18mm diameter length 45 m)
- 4 Mooring ropes (18mm diameter length 15 m)
- 6 Fenders (250mm diameter length 0,7 m)
- Stainless steel bow fitting
- Fore canvas sunshade
- Set of flybridge covers (console + Bench seat + Table)
- Exterior guards: (Oyster or Flanelle)
- Aft cockpit closing
- Cockpit wheelhouse cover
- Flying bridge bimini top
- · Black exterior curtains Sunworker
- · Manual fold-up polyester gangway
- · Electric flybridge grill
- Folding cockpit table + 2 Folding arm chairs
- Flip-top flybridge table
- Teak fore deck and port side deck
- Teak slats on cockpit and starboard side deck
- · Teak slatted aft swim deck
- 3 Solar panels on flybridge pushpit
- Electric launching system

ELECTRICAL SYSTEM

- 7,5 kVA Generator
- · Deck searchlight
- Underwater light

WATER SYSTEM

- Watermaker (60 l/h / 16 US Gal/hour)
- Shore fresh water supply
- Rigid sewage reserve

ENGINE

- Bow thruster
- Stern thruster

NAVIGATION ELECTRONICS

- Raymarine AIS
- Radar
- Rear camera